

Other terminal sets available on request.



- Stainless steel cover screws with quick fastening metric thread. Reducing cover fixing time.



- Labelling system for circuit description.
- Label template on the Internet at www.hensel-electric.de - in the 'Downloads' area.



- Included accessories as listed: grommets ESM = IP 55



- DK cable junction boxes with main branch terminals for copper conductors are equipped with sealable lids.




- Burning behaviour: Glow wire test according to IEC 60 695-2-11: 750 °C, flame-retardant, self-extinguishing




RD 9123
1.5-2.5 mm²


- 3 terminal blocks WKM 2.5/15
- per terminal 2 x 0,5-2,5 mm² f, 2 x 0,5-4 mm² sol or 2 x 1,5-2,5 mm² s, see Technical details for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- with external fixing
- for normal environment and protected outdoor

rated insulation voltage	AC/DC 500 V
current carrying capacity	24 A
tightening torque for terminal	0,4 Nm

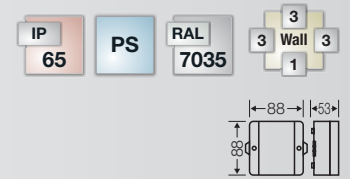
RD 9125
1.5-2.5 mm²


- 5 terminal blocks WKM 2.5/15
- per terminal 2 x 0,5-2,5 mm² f, 2 x 0,5-4 mm² sol or 2 x 1,5-2,5 mm² s, see Technical details for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- with external fixing
- for normal environment and protected outdoor

rated insulation voltage	AC/DC 500 V
current carrying capacity	24 A
tightening torque for terminal	0,4 Nm

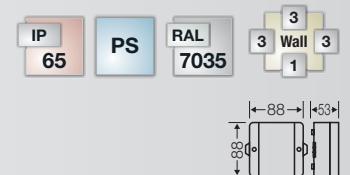
RD 9127
1.5-2.5 mm²

- 7 terminal blocks WKM 2.5/15
- per terminal 2 x 0,5-2,5 mm² f, 2 x 0,5-4 mm² sol or 2 x 1,5-2,5 mm² s, see Technical details for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- with external fixing
- for normal environment and protected outdoor

rated insulation voltage	AC/DC 500 V
current carrying capacity	24 A
tightening torque for terminal	0,4 Nm

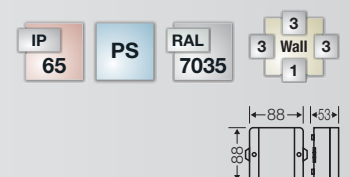




RD 9045

1.5-4 mm²

- 5 terminal blocks WKM 4/15
- per terminal 2 x 0,5-4 mm² f, 2 x 0,5-6 mm² sol or 2 x 1,5-4 mm² s, see Technical details DK cable junction boxes for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- for normal environment and protected outdoor




rated insulation voltage	AC/DC 500 V
current carrying capacity	28 A
tightening torque for terminal	0,5 Nm



RD 9041

1.5-4 mm²

- 10 terminal blocks WKM 4/15
- per terminal 2 x 0,5-4 mm² f, 2 x 0,5-6 mm² sol or 2 x 1,5-4 mm² s, see Technical details DK cable junction boxes for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- for normal environment and protected outdoor




rated insulation voltage	AC/DC 500 V
current carrying capacity	28 A
tightening torque for terminal	0,5 Nm



RK 9062

1.5-4 mm²

- 12 terminal blocks WK 4/U
- per terminal 2 x 0,5-4 mm² f, 2 x 0,5-6 mm² sol or 2 x 1,5-4 mm² s, see Technical details DK cable junction boxes for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- for normal environment and protected outdoor



rated insulation voltage	AC/DC 690 V
current carrying capacity	41 A
tightening torque for terminal	0,5 Nm

with Terminal Blocks for Aluminium- and Copper Conductors Cable Entry via Metric Knockouts




RK 9064

1.5-4 mm²

- 14 terminal blocks WK 4/U
- per terminal 2 x 0,5-4 mm² f, 2 x 0,5-6 mm² sol or 2 x 1,5-4 mm² s, see Technical details DK cable junction boxes for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- for normal environment and protected outdoor

rated insulation voltage	AC/DC 690 V
current carrying capacity	41 A
tightening torque for terminal	0,5 Nm




RK 9109

1.5-4 mm²

- 19 terminal blocks WK 4/U
- per terminal 2 x 0,5-4 mm² f, 2 x 0,5-6 mm² sol or 2 x 1,5-4 mm² s, see Technical details DK cable junction boxes for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- for normal environment and protected outdoor

rated insulation voltage	AC/DC 690 V
current carrying capacity	41 A
tightening torque for terminal	0,5 Nm



RK 9104

1.5-4 mm²

- 24 terminal blocks WK 4/U
- per terminal 2 x 0,5-4 mm² f, 2 x 0,5-6 mm² sol or 2 x 1,5-4 mm² s, see Technical details DK cable junction boxes for more information about terminal assignment
- terminal blocks, by Wieland
- for aluminium and copper conductors
- terminal marking, neutral
- cable/conduit entry via metric knockouts order ESM/AKM separately (refer to index LES)
- for normal environment and protected outdoor

rated insulation voltage	AC/DC 690 V
current carrying capacity	41 A
tightening torque for terminal	0,5 Nm

